RE L2 H2 W4 ASI B


REBLOC 80XAS_8

Technical Datasheet

REBLOC 80XAS_8


Precast Concrete Vehicle Restraint System

Permanent System Free standing

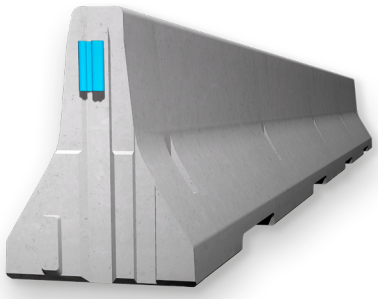

Technical data

Containment level	**L2 / H2**	**L2 / H2**
Working width	**W4 (W_N ≤ 1.3 m)**	**W5 (W_N ≤ 1.7 m)**
Impact severity level	**ASI B**	**ASI B**
Vehicle intrusion	**VI3 (VI_N ≤ 1.0 m)**	**VI4 (VI_N ≤ 1.3 m)**
Installation	**free standing on asphalt | concrete**	**free standing on compacted soil**
Application	**single-sided | double-sided**	
Minimum installation length	**80 m (10 elements) + initial/end anchorage**	
Initial/end anchorage	**required (according to anchor chart 39-10501): e.g. REBLOC 80X_4T or force closure**	
Dimensions L x W x H in cm	**800 x 59 x 80 cm**	
Weight/element	**approx. 4670 kg**	
Curve radius	**r ≥ 235 m, smaller radii on request**	
Coupling/exposed steel parts	**fully integrated, exposed parts hot-dip galvanized**	

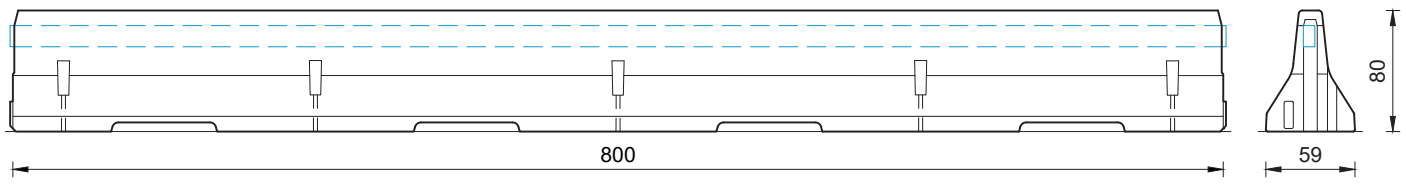

all dimensions in cm

Copyright and pictures: REBLOC, changes and misprints reserved.